

MC 46 SHORT SPLIT

Scotsman
Ice Systems

Modular Ice Machine 310 kg

Item #:

Project:

Quantity:



FEATURES

- Produces individual Gourmet crystal clear supercubes.
- PS plastic top cover.
- "Universal Standard 30".
- Resistant stainless steel exterior.
- 4-pipe system patent, to increase production and efficiency.

CONDENSING SYSTEM

SPLIT

REFRIGERANT GAS

R404A
R452A

VOLTAGE V/Hz/ph

230/50/1
230/60/1

RECOMMENDED BINS

Head

Bins

kg

MC 46



SB550

252

CBT48MCSD

SB948

406

CBT52MCSD

SB1025

478



UBH1100

553



UBH1600

812



SIS700

318 + 78



SIS1350

613 + 73 + 73

LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxxx : need additional bin top

CERTIFICATIONS



OPERATING REQUIREMENTS

Minimum

Maximum

Air temperature

10

43

Water temperature

5

38

Water pressure

1 bar (14 psi)

5 bar (70 psi)

Electrical voltage

-10%

+10%

IMPORTANT NOTICE:

Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**
Apple store
Google play
Windows store

DOWNLOAD

www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine 310 kg

March 2022

MC 46 SHORT SPLIT


Modular Ice Machine 310 kg

Scotsman
Ice Systems

Item #:

Project:

Quantity:

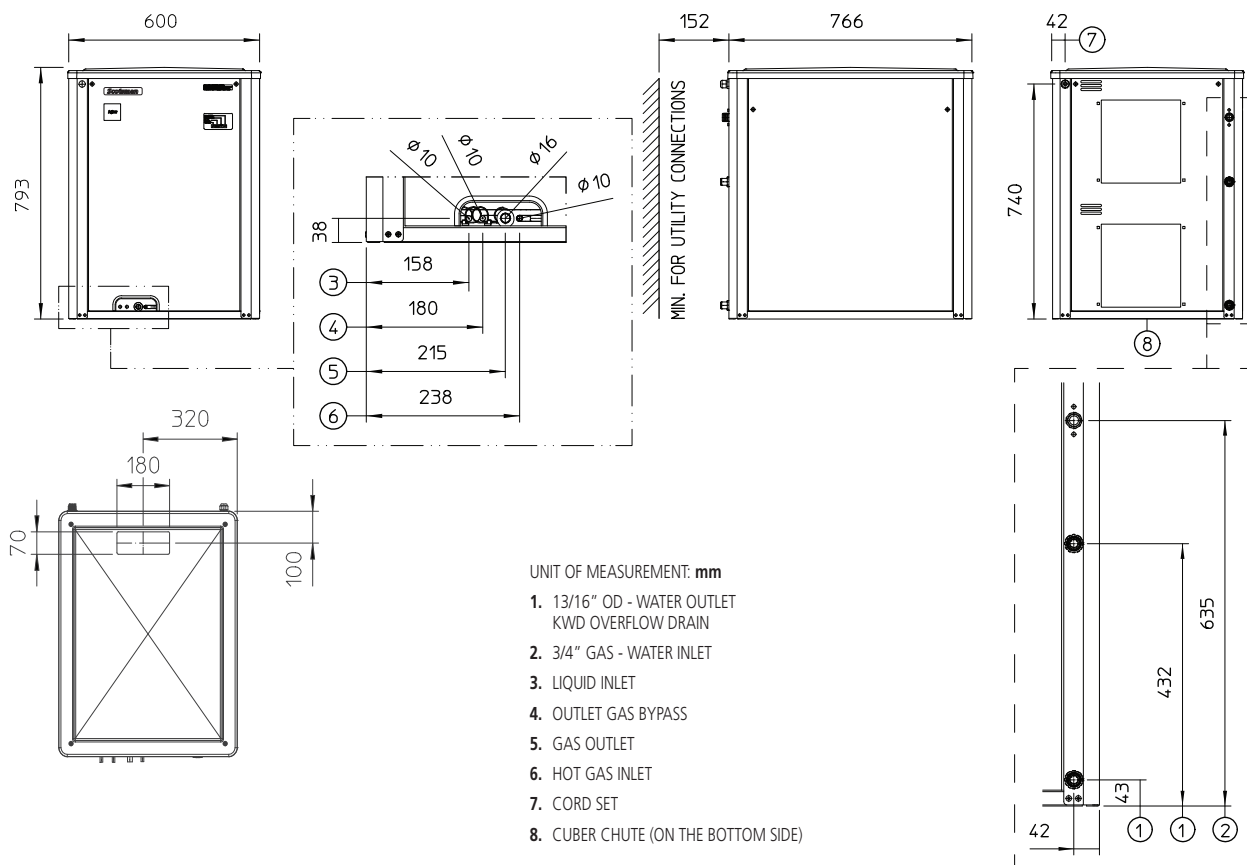

UNIT DATA				SHIPPING DATA							
Size (W x D x H)		600 x 766 x 793 mm		Carton (W x D x H)		850 x 700 x 970 mm					
Net weight		54 kg		Weight		64 kg					
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
MCL 46 SPLIT	230/50/1	310	300	230	7.8	18.0	9.6	300	2100	3 x 1.5	20
MCM 46 SPLIT	230/50/1	310	300	230	7.8	18.0	9.6	300	2100	3 x 1.5	20
MCXL 46 SPLIT	230/50/1	310	300	230	7.8	18.0	9.6	300	2100	3 x 1.5	20
MCL 46 SPLIT	230/60/1	310	300	230	7.8	18.0	9.6	300	2100	3 x 1.5	20

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions